
Connekt - Back to back



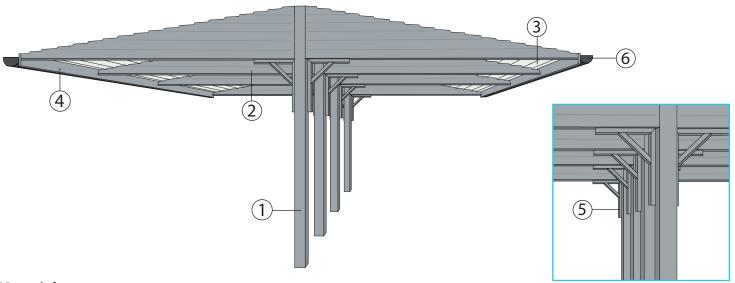

Materials

- 1. Post Galvanized steel and powder coated finish (standard colours and bespoke)
- 2. Beams GRP Glass reinforced polyester (standard colours and bespoke)
- 3. Roofing sheets Fibreglass
- 4. Fascia Aluminium (standard colours and bespoke)
- 5. Gallows Brackets (6.2m & 7.4m span require gallows brackets)
- 6. Guttering UPVC

Standard colours



^{*} We can also supply and manufacture bespoke colours and match any RAL number provided.

Available sizes

7.4m Span - (3.7m either side of central post) - Beams will require gallows brackets

6.2m Span - (3.1m either side of central post) - Beams will require gallows brackets

5.0m Span - (2.5m either side of central post)

3.8m Span - (1.9m either side of central post)

There is no limitation to length as it is a modular system.

Guarantee: 10 years

Fixings

Installation of the canopy would include for a mass filled concrete foundation to which the posts would be either bolted or cast in situ. All aspects of the canopy would be designed and include site specific structural calculations for wind and snow loadings. This would include the terrain category, height above sea level, distance to shoreline and wind & snow loads at the site location.

Fully tested

Our canopies comply to **BS6399-2:1997** for wind loadings and **BS6399-3:1998** for imposed loads and have been independently tested. More recent tests were undertaken with design load specifications as defined in **Eurocodes EC1 Parts 3 and 4** (which have recently succeeded BS6399). These tests have been veryfied by independent structural engineers.







